

Triton 25™ - NRC 0.95, CAC 22

High Sound Absorbing Ceiling Panel

Technical Data Sheet—BPIR Class 1



asona



Photo: Wakatipu School, Triton 25, 600 x 1200 with Sonaris random slot perforated finish

Description.

Triton 25™ is a made in NZ high sound absorbing ceiling panel that is designed to control unwanted noise reverberation. Triton panels are available in a wide range of sizes and decorative colours, wood prints and perforated acoustic laminate patterns.

Application.


Triton 25™ is ideal for use in schools, open plan offices, call centres, libraries and general offices.

Composition.

Manufactured from 48 kg/m³ bio-soluble glass wool absorber, tissue backed, Sonatex™ / Sonaris™ acoustic laminate finish. Suspension grid from coated galvanised steel.

Features & Benefits.

- Very high sound absorption rating to control reverberation, NRC 0.95, ISO 11654 class A, α_W 1.0, combined with CAC 22 rating to block noise.
- **Ministry of Education DQLS V3.1 2024 compliant solution.**
- Fire Group 1-S.
- Broad range of [Sonatex™](#) and [Sonaris™](#) decorative acoustic laminate finishes for design flexibility.
- Panels available with strippable foil option to better protect the decorative finish during the construction phase.
- GreenTag Certified level A, low VOC, core contains 80% recycled post consumer waste glass.
- Made in NZ for short lead times including replacement parts.
- Product stewardship Renew and Reuse program available.
- Packaging take back and reuse scheme available (NZ only).
- Durable and dimensionally stable in high humidity.
- Light weight for seismic, easy to work and trim.

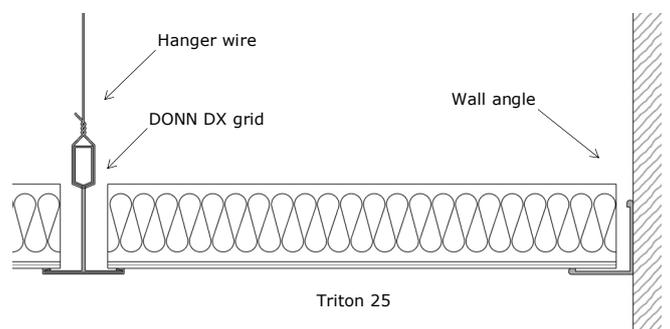

Detail: Triton 25 ceiling tiles suspended on Rondo Donn DX Grid

Triton 25™ - NRC 0.95, CAC 22

High Sound Absorbing Ceiling Panel

Technical Data Sheet — BPIR Class 1



asona

Technical Specifications:

Item #	Size (nominal) *	Edge
TR25.0312	25 X 300 X 1200 mm	A / Square
TR25.0606	25 x 600 x 600 mm	A / Square
TR25.0612	25 x 600 x 1200 mm	A / Square
TR25.0618	25 x 600 x 1800 mm	A/ Square
TR25.0624	25 x 600 x 2400 mm	A/ Square
TR25.1212	25 x 1200 x 1200 mm	A / Square

*Special sizes to order, max width 1200mm, length 2400 mm, ideal for borders

Sound Absorption Rating:

α_w 1.0; Class A; NRC 0.95 per ASTM C423
ISO 354 E-200, Test report T0405-05

Hz	125	250	500	1000	2000	4000
α_p	0.55	0.85	1.00	0.95	1.00	1.00

Environmental Impact:

Global GreenTag Certified, Class A, contains 80% recycled local glass waste, low VOC <0.002 Mg/M²/hr per ASTM D5116, damaged or soiled panels can be resurfaced to extend useful life and reduce construction waste/ landfill.

Laminate Finishes:

Triton 25™ is available in standard Sonatex™ white, black, grey and a range of wood prints, RAL colours and Sonaris™ perforated laminate finishes. Refer to online [Sonatex™](#) / [Sonaris™](#) finishes charts for colour and size options.

Light Reflectance Value:

85% per BS8493:2008, White

Limitations:

- For interior use only, and not in direct contact with water.
- Not for use with negative air return plenums.
- Maximum humidity/temperature 99% R/H at 45°C.
- Back loading max. 1.5kg/m², point loads to be independently supported.

Maintenance:

Clean with a vacuum, soft brush or damp cloth.
Re-surfacing of damaged panels available, consult Asona.

NZ Building Act

This product is not subject to a warning or ban under Section 26.

NZ Building Code Compliance:

- B2 Durability – Clause B2.3.1 (c) (i): Asona ceiling tiles with only normal maintenance will have a minimum durability of at least 5 years when installed in accordance with; manufacturer's installation requirements and AS/NZS 2785:2020.
- C3 Fire – Clause C/AS2 3.4(a): Asona Triton 25 has a Fire Material Group Number 1-S by NZBC verification method C/VM2 Appendix A, tested in accordance with ISO 5660 or ISO 9705. (NCC BCA C1.10 clause 4, spec A2.4 clause 4. Group 1)

Packaging Take Back Scheme: (NZ only)

Flat pack cartons on site and return to Asona for reuse.

Renew & Reuse Stewardship Program:

Soiled or damaged panels can be resurfaced with new Sonatex or Sonaris laminates for reuse in the ceiling. Helps extend life cycle and reduce construction waste. Register on practical completion.

Service Panel Protection:

Panels are available with temporary foil covering to protect and keep panels clean during the construction phase.

Thermal Resistance:

R 0.7 m²C/W

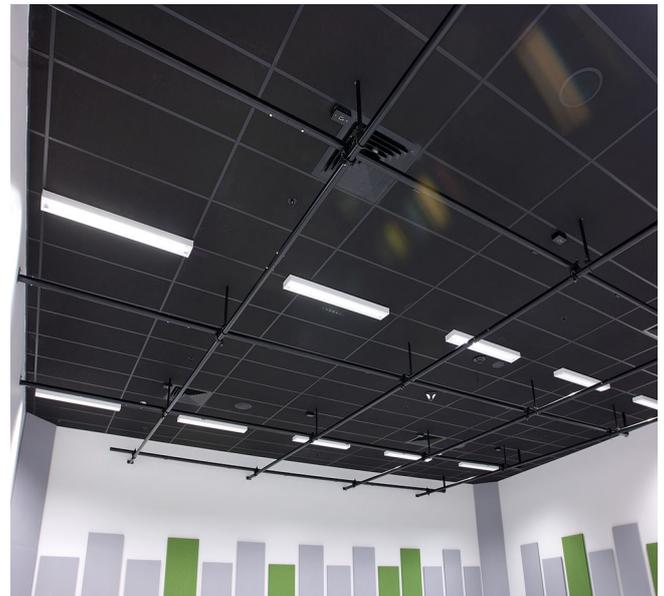


Photo: Hobsonville Point Secondary School, Triton 25 with black Sonatex facing

Warranty:

15 year limited warranty against manufacturing defects, extendable to 30 years when registered for Asona's Renew and Reuse program.

Weight:

1.5 kg/m²

Installation:

Shall not commence until the building is watertight and dry. This product is designed to be mounted into a two-way exposed grid system and installed to manufacturer's and AS/NZS 2785:2020 Standard's requirements. Seismic design may require a suitably qualified engineer. Hold down clips may be required in areas of wind uplift, and/or air grilles used to balance air pressure. Care shall be taken when handling tiles to avoid damage.

Specification:

Ceiling system shall be Asona Triton 25™ high sound absorbing ceiling as manufactured by Asona Ltd Auckland NZ Tel: +64(0)9 525 6575 info@asona.co.nz. Selected panel shall be item # (), size 25 x () x ()mm, square edge with Sonatex™ decorative laminate finish (white) (black) (RAL colour #) (wood-look print) (Sonaris™ perforated pattern#), sound absorption Class A, α_w 1.00, NRC 0.95, CAC 22, Fire Group 1-S. Suspension system shall be Rondo Donn DX two way exposed grid system with 19 x 22 mm wall angle, grid colour (white) (black). (Supply service panels with temporary protective removable foil). Contractor shall flat pack packaging and return to Asona for reuse and register the ceiling with Asona Renew and Reuse product stewardship program on practical completion. (Asona ceiling Masterspec 5311AS specification available).

Asona Ltd

Office and Factory:
Units 12-16, 7 Cain Road
Penrose, Auckland 1061,
New Zealand
T: +64(0)9 525 6575
E: info@asona.co.nz
W: www.asona.co.nz
NZBN: 9429036035175

Australia:
T: 1 800 240361
E: info@asona.com.au
W: www.asona.com.au

ISO 9001:2015 Registered Firm No. NZ1014

© 2023 Copyright ASONA Ltd Asona, Triton 25, Sonatex, Sonaris are trade marks of Asona Ltd, Donn DX is a trade mark of Rondo Building Services Pty Ltd
*All dimensions are nominal. We reserve the right to change specifications.
Ref. Triton 25-24.9

